



Eagle
3000

SAFETY
WARNING

Medium
30/40#

WARNING

Medium
30/40#

Extra Soft
68

HONDA
GXV
160
OHV

EXCIPRO
PR 1/8

WARNING

WARNING

Hard
30/40#



Contents

- 3 Stone Extreme
- 4 LX30 Pro
- 5-7 PRO Line Tooling
- 8 Edger 19" and TG30
- 9-10 TG18, TG12, TG8 and RT8
- 11-13 TEQ-Lok (TL) Tooling
- 14-15 DT Tooling
- 16 DMT and QCS Tooling
- 17 MT, NCE, NGP, TFW, and SM Tooling
- 18 QC and 1P-Mag (3") Tooling
- 19 KR, WM and T-Plug 2" Tooling
- 20 EZC Tooling
- 21 Fixed Diamond Plates, Blocks, and Scarifier tooling
- 22-24 Velcro Polishing Pads
- 25-27 Cup Wheels
- 27 Dust Shrouds and Blades
- 28-29 Eagle by DITEQ Burnishers
- 30-31 Electric Burnishers and Swing machines
- 32-33 Burnisher Pads
- 33 Densifiers, Guards and Impregnators
- 34-35 Dry Industrial Vacuums and Dust Control
- 36-37 Wet Vacuums
- 38-40 Industrial Scrubbers
- 41 Cleanup
- 42 Slurry Treatment
- 43 Terms and Conditions/Warranty

*Discover the DITEQ
Difference!*

DITEQ – The New Global Leader in Surface Prep

DITEQ Diamond tools:

DITEQ is known for innovative and productive diamond tools. The G3 diamond arrangement technology is years ahead of any competitors R&D efforts



To keep pace with an ever changing surface prep market, DITEQ has state of the art diamond tooling engineering and production facilities in Southern California and South Korea.

DITEQ Equipment:

DITEQ Grinders, Polishers and Burnishers are proudly made in the USA. DITEQ has facilities in Kansas and Georgia. In August 2019 DITEQ purchased the Eagle (Stonekor), a recognized leader in floor care machines since 1989.




DITEQ offers electric, hydraulic and propane machines. The propane systems use a patented **ProCarb™** technology, carefully tuned to maximize engine torque and produce minimum carbon emissions. DITEQ tunes its **ProCarb™** system and catalytic converter at the engine revolutions per minute that delivers maximum engine torque while ensuring the lowest levels of balanced carbon monoxide, hydro-carbons, and nitrous oxide emissions. This approach results in the quietest, most fuel efficient, and lowest emissions propane system available in the market.

Right Hand or Left Hand Rotation:

DITEQ uses the industry accepted nomenclature for identifying tooling that is direction sensitive. The perspective is from the operators position



Note: 1) Some machines have an option to change rotation
2) Planetary machines – the planetary disc can sometimes spin opposite to the main disc

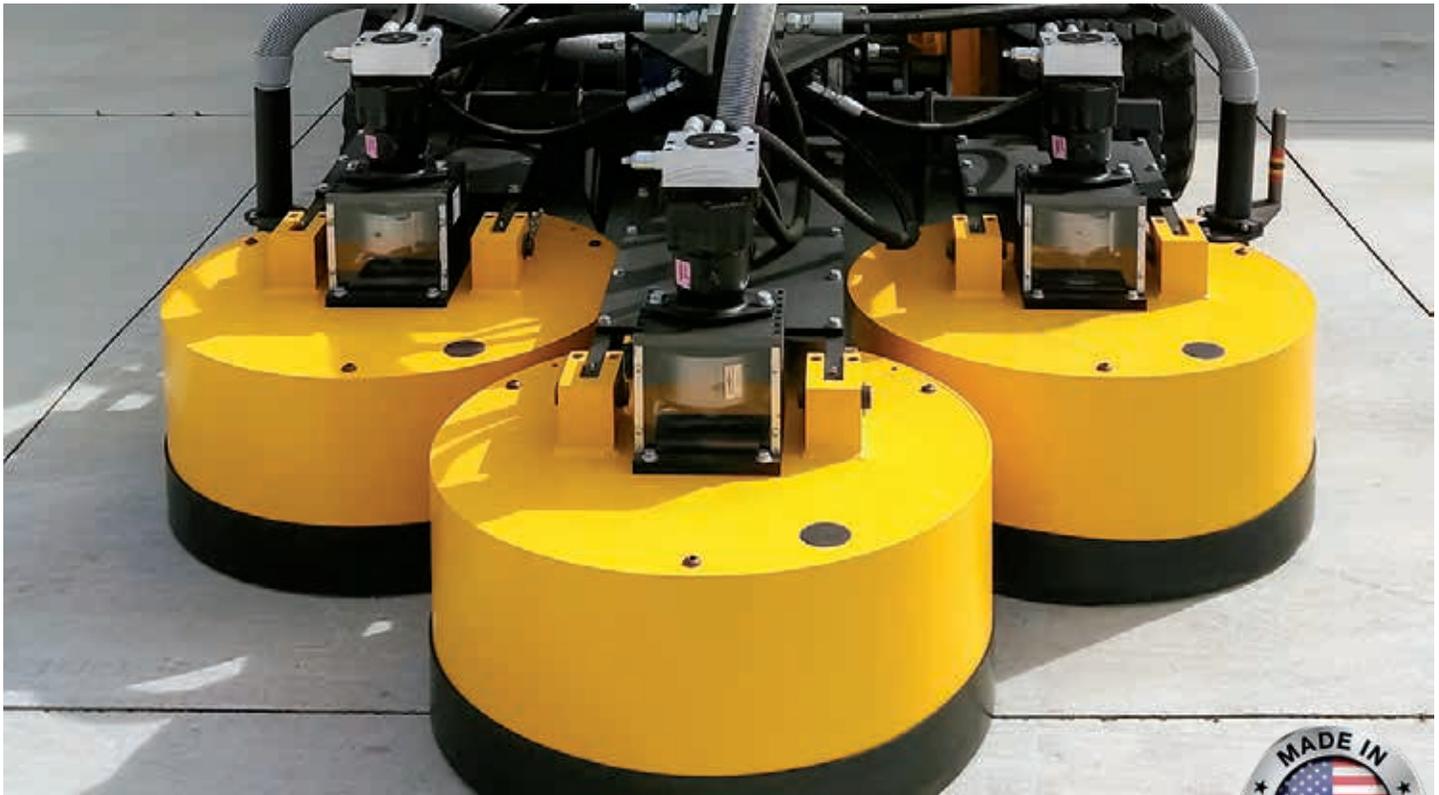

Stone Extreme

The Stone Extreme provides ultimate productivity for grinding and polishing concrete, stone, and terrazzo in large, open spaces. This unit offers 8 to 10 times more productivity compared to walk-behind units, and the Stone Extreme dramatically reduces labor costs and shortens project elapsed time.


FEATURES

- Exceptional productivity
- Very easy to operate
- Smooth, hydraulic power
- Wet or dry operation
- Planetary extra HD Gearbox w/ high torque 2" Input/Output shafts

Stone Extreme

Grinding Width	74 inches
Dimension of Heads	L 192" x W 77" x H 80"
Head Assembly Weight	2,975 lbs
Head Power	3 x 25 HP
Head Speed	840 rpm (450-500 rpm plate)
Head Pressure	933 lbs
Hydraulic System to Operate Head	35-37 gpm
Production	8,000 ft ² per hour – double pass
Vacuum Ports	3
Head Shipping Weight	3,800 lbs
Total Weight with Skid Loader	12,800 lbs
Part No.	300135*

*Does not include skid steer unit

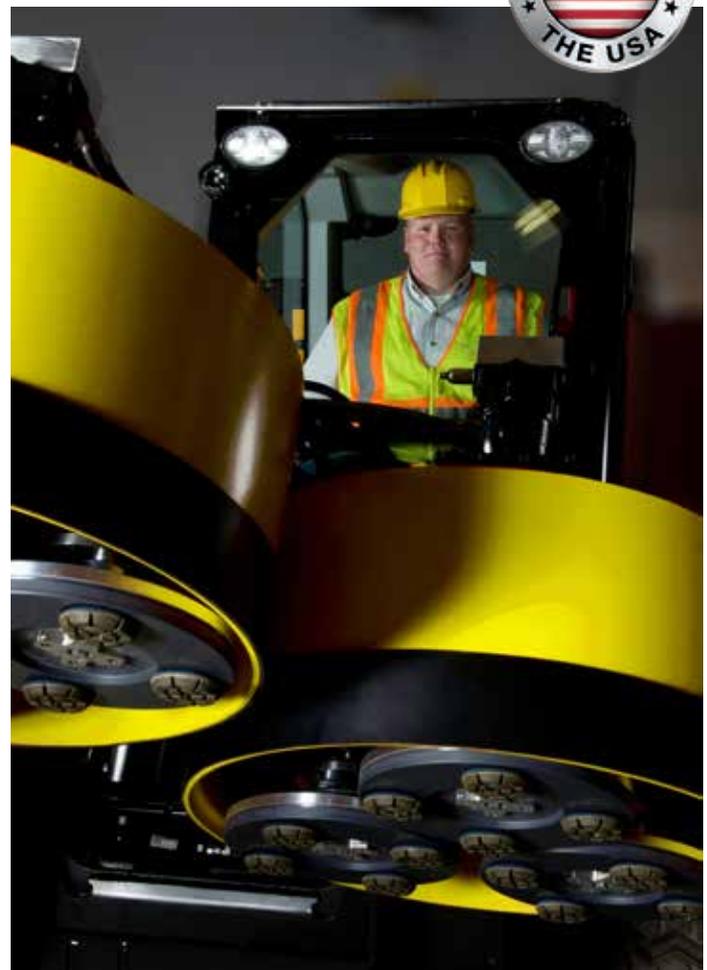

Standard rotation is LH (left hand)

CONCRETE GRINDING & POLISHING

LX30 PRO (Floating Head)

The LX30 PRO grinder and polisher accommodates uneven floor surfaces with its unique floating head design. The LX30 PRO combines flexibility with maximum power and productivity to achieve a superior polish across all floor surfaces. The LX30 PRO utilizes the KOR™ HD Gearbox for maximum torque and durability. The DITEQ ProCarb™ carburetor exceeds EPA and CARB requirements for indoor use.

Use wet or dry.

FEATURES

- 3" Vacuum Port
- Water Tank
- Fully Adjustable Handle
- High Visibility Engine Tack
- Tie-Down and Lifting Points



LX30 PRO Planetary

Specifications:

Grinding Width	30"
Production	800-1300 sf per hour
Horsepower	27
Drum Speed	1040 rpm Clockwise
Head Speed Rpm	470 rpm Counterclockwise
Head Pressure	900 lbs
Water Tank Capacity	11 gal
Engine	Kawasaki FX850V Propane
Dimensions (LxWxH)	80" x 38" x 55"
Machine Weight	1,340 lbs
Shipping Weight	1,440 lbs
Part No.	G00148



Standard rotation is LH (left hand)

PRO Line Tooling

IP-MAG/BO-83mm

Special Formulation of Diamond, Concentration and Matrix for maximum performance on LX30 PRO and Stone Extreme (PRO Line Machines)

Universal base compatible with common tool plates for the PRO line machines with traditional bolt-on as well as a single pin magnetic quick change design

The pin is removable (threaded).

For use on the bolt-on (BO) plates, the entire plate can be used for a quick and easy accessory change. It is easy to see the bond by the number of segments (Soft=7-segs, Medium=10-segs and Hard=9-segs)and the Diamond Grit size by the color.

Sharp edges for better cutting into coatings and faster stock removal with these big geared down propane and hydraulic machines.

Bond by Number of Segs

Soft Bond	7-segs
Medium Bond	10-segs
Hard Bond	9-segs

Mesh#/Grit by Color

16 Grit	Grey
30G	Green
50G	Blue
100G	Yellow
200G	Orange



IP-MAG/BO-83mm

Grit	Soft Bond	Med Bond	Hard Bond
16	300313	300343	300373
30	300315	300345	300375
50	300320	300350	300380
100	300330	300360	300390
200	300335	300365	300395



300375 – 30G Hard Bond



300360 – 100G Med Bond



300330 – 100G Soft Bond



The plates for bolt-on tooling (plate p/n-200179) on the LX30 PRO and Stone Extreme have options for either 3 or 4 bolt-on segments. The hole patterns also include an option for bolt-on traps for even more options. The pin needs to be unthreaded from the universal segments and qty-3 M6 screws per segment must be used to bolt them in place.



200179 with 4-bolt-on

The advantage of bolt-on tooling is that the power and aggressiveness of the LX30 PRO and Stone Extreme on rough slabs can hammer on the segments during the grinding process and the bolt-on tooling proves to be the most secure in the harsh abuse of heavy stock removal and aggressive grinding.



200179 with 3-bolt-on



Leaving the Pin in the segment, the plates (magnetic plate p/n-200476) have a recessed pocket to secure the segment from moving, the pin further secures it with high resistance to shear or pounding forces from rough slab surfaces, and a rare earth high magnetic energy magnet to hold the segment in the recessed pocket.



200476 with 4-1P Mag

PRO Line Tooling

300307 1P-MAG/BO-83mm 16G Transformers

The Transformers are a very unique coating removal metal bonded segment tool that can be used either on the 1-Pin Magnetic Plates or as bolt-on.


Use Wet or Dry



300307 in 200476 Tool plate



300307



300307 on 200179 tool plate (on Left side with 4 and right side with 3)


Resin Bond 83mm (MB-series) Tooling

The MB Series Resins are specially formulated for high productivity, life and polish with the LX30 PRO and Stone Extreme machines.

Use wet or Dry

Resin Bond 83mm MB-series

Part No.	Description.
300405	MB 3" Resin 50G
300410	MB 3" Resin 100G
300415	MB 3" Resin 200G
300420	MB 3" Resin 400G
300425	MB 3" Resin 800G
300430	MB 3" Resin 1500G
300435	MB 3" Resin 3000G

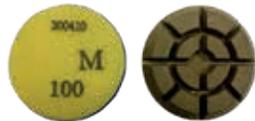

300410



Velcro Back Adapters

Part No.	Description.
300599	1P-MAG-83mm Pad Driver
700120	BO-Velcro Pad Driver 83mm
160969	TL Pad Driver 83mm

The tool plates for the PRO Line machines can be changed out easily and quickly. Different plates are available to accommodate different needs

PRO Line Tool Plates

Part No.	Description.
200179	BO- 3 or 4 tools
200476	1P-Mag-83mm 4 tools
200653	1P-Mag-83mm 3 tools
200786	Resin-Velcro 4 tools
200787	Resin-Velcro 3 tools
161702	TL and/or BO 4 tools
161879	TL and/or BO 3 tools

TEQ-Lok (TL) Tool Plates for PRO Line

The TEQ-Lok tool plates have the TEQ-Lok Slots, which are a direct fit for the Husqvarna Redi Lock and STI Wedge tooling, as well as accommodations for Bolt-on (BO) tooling in both the 3-Hole pattern used by the PRO Line BO tooling and the 3-Hole standard Trap bolt patterns in DT and DMT.



161879



161702

See page 11-13 for common TEQ-Lok tooling options.



Low Profile Edger uses FRANKFURT tooling

Frankfurt shoes are available to use on all of the PRO Line tooling options.

Use wet or Dry

Frankfurt Shoes

Part No.	Description.
680772	BO 3 hole Trap pattern
700087	BO like 680772 with Velcro
680824	BO 3 hole PRO Line pattern
200499	1P-MAG-83mm
162904	TL Steel Plate
162789	TL Aluminum Plate



200499



162789



Frankfurt Diamond Blocks

Part No.	Description.
162356	Frankfurt 30M Course 8-Seg
162357	Frankfurt 50M Course 8-Seg
162359	Frankfurt 200M Fine 8-Seg
162360	Frankfurt 30H Course 8-Seg
162361	Frankfurt 50H Course 8-Seg



162356

Propane Tanks

The Steel Tank is an industry standard and comes with the PRO Line machines. Optional lighter weight aluminum tank (15Lbs lighter) is available

Propane Tanks

Part No.	Description.
1705	Steel Tank
680053	Aluminum Tank



680053

Low Profile Edger

The Low Profile Edger offers a solution to rapidly grind and polish edges and seamlessly feather those edges into the main floor area. The Low Profile Edger cuts within ¼-inch of walls and obstacles, and its 3½-inch height enables the operator to grind under counters and overhangs. This machine greatly reduces the time and labor required to finish edges and achieves the same quality and specification with the main floor area. The edger has adjustable head pressure with three 20 lbs weights and direct drive rotation. Vacuum port for use with industrial dust vacuum. The wheels are adjustable and the propane tank is steel. The machine can use 6 metals or resins on Frankfurt plates (See page 7).

Use wet or dry.

Low Profile 19" Edger Grinder/Polisher

Specifications:

Disc Size	19"
Production per hour	450-550 Lineal Ft/Hr per cut
Water Tank Capacity	8 gal
Head speed	640 rpm
Head Pressure	165 lbs
Horsepower/rpm	18 hp
Engine	FS481V Kawasaki Propane
Dimensions (LxWxH)	55" x 39.5" x 56"
Machine Weight	650 lbs
Shipping Weight	750 lbs
Part No.	300604



Standard rotation is RH (right hand)

The standard tooling plate on the Low Profile Edger has Frankfurt slots (see page 7 for Frankfurt Options) configured for either 3-tools (1/2 Load) or 6 Tools (Full Load).



TG Series TEQ Grinders/Polishers

TG30 30" Planetary

The TG30 machine offers a mid-range grinding and polishing solution for light to medium duty floor preparation and finishing. The TG30 utilizes KOR™ MD Gearbox and medium-weight design to achieve rapid productivity on all surfaces. The TG30 is planetary and can be used wet or dry.

This machine with DITEQ ProCarb™ carburetor exceeds EPA and CARB standards.

Use wet or dry.

TG30 Planetary Grinder/Polisher

Specifications:	Propane	Electric
Disc Size		30"
Production per hour		800-900 sf
Drum Speed		1082 rpm
Head speed		640 rpm
Head Pressure		350 lbs
Horsepower/rpm	18 hp	10 hp
Engine/Motor	FS481V Kawasaki Propane	Leeson
Machine Weight		650 lbs
Shipping Weight		700 lbs
Part No.	G00118	G00139



Standard rotation is LH (left hand)
The standard tooling plate (700700) has TEQLok (TL) slots configured for either 3-tools per plate (9 total for a load) or 4-tools per a plate (total 12 per load)



TG18 18" Grinder/Polisher

The TG18 features a 18" multi-accessory plate that accommodates both bolt-on and TEQ-Lok accessories. A longer wheelbase to maximizes the head weight, geared down for lower rpm with increased torque and longer arc swing and operator leverage for very aggressive grinding action. The full floating head allows it to grind unlevel surfaces easily

Use wet or dry.

TG18	Electric 1-Phase	Electric 3-Phase	Gasoline	Propane
Disc Size	18"	18"	18"	18"
Power	5HP 220V	5HP 480V	11HP Honda	18HP Kawasaki FS481V
	23 Amps	6.6 Amps	Gasoline GXV340	Tank (4-6Hr Runtime)
RPM – Disc	425	425	1400	1400
Dimensions	56" x 37" x 25"	56" x 37" x 25"	56" x 37" x 25"	56" x 37" x 25"
Weight	290 lbs	290 lbs	280 lbs	360 lbs
Part No.	G00066	G00068	G00134	G00116

Multi-accessory plate, for Bush Hammers (162623) x3, for Cup Wheels x3-5 using 5/8-7/8 cup wheel and 1 each of (160232) spacer, (160255) Nut, (160257) Washer and (900001) Bolt, For Backer Pads x3 use 1 each of 5/8-11 threaded backer pad and (160254) bolt, BO tooling both Trap and PRO Line hole patterns x8 using 1 each (910190) M6x22 SHCS, and, TEQ-Lok 8 slots for full load or 4 slots for a 1/2 load.



161132



G00066



G00070

G00116

Standard rotation is RH (right hand)

TG12 12" Grinder/Polisher

The TG12 features a 12" multi-accessory plate that accommodates both bolt-on and TEQ-Lok accessories. Handles fold down for easy transport. TG12 provides maximum fixed grinding width to follow contour of normal undulations of concrete slabs for fastest grinding following the natural contour of the surface.

Use wet or dry.

TG12	Electric 1-Phase	Electric 1-Phase	Electric Variable 1-Phase	Gasoline
Disc Size	12"	12"	12"	12"
Power	3HP 220V	5HP 220V	3HP 220V	11HP Honda GX340
Amps	16.8 Amps	23 Amps	8.4 Amp	Gasoline
RPM – Disc	1000	1000	Variable 0-1000	2000
Dimensions	32" x 41" x 18"	32" x 41" x 18"	32" x 41" x 18"	32" x 41" x 18"
Weight	220 lbs	220 lbs	200 lbs	200 lbs
Part No.	G00117	G00051	G00054	G00055

Multi-accessory plate, for Bush Hammers (162623) x3, BO tooling for Trap pattern x6, and TEQ-Lok 6 slots for full load or 3 slots for a 1/2 load.



160223



G00051



G00055

Standard rotation is RH (right hand)

TG8 and RT8 TEQ-Grinder/Polisher



G00057



G00048



RT8
G00142



FEATURES

- Tool-less Heavy Duty Adjustable Dust Skirt (p/n 161790).
- Longer wheelbase to maximize the head weight, geared down for lower rpm with increased torque and longer arc swing and operator leverage for very aggressive grinding action.
- Dual size vacuum port for 2" and 3" vacuum hoses.
- Adjustable handle with bolted joint to maintain its rigidity. Handle folds down for compact storage and easy transport in car trunks.
- Welded steel frame construction with tough powder coat finish.
- Large 8" grey non-marking wheels.
- Heavy duty flexible coupler for fast grinding of rough and uneven slab surfaces.

Ideal for:

- Coating removal including epoxies, polyaspartics, urethanes, paints, thinset, cut back adhesives, and sealers.
- Grinding smooth rough concrete surfaces.
- Leveling uneven or curling slabs.
- Grinding hard surfaces, feather edging sidewalks and gutters, high and uneven joints and similar surfaces.
- Very aggressive grinding with many tooling options to customize the machine for maximum performance.

TG8 and RT8 Grinder/Polisher

	TG8	TG8	RT8
Disc Size	8"	8"	8"
Motor/Engine Brand	2 HP Leeson	5.5 HP Honda	1.5 HP Leeson
Phase	Single	Gas	Single
Volts	115v 1PH		115v 1PH
Amps	18.4 A		13 A
HP	2 HP	5.5 HP	1.5 HP
RPM – Disc	2800	2800	1750
Model	FGE 2L	FGG 5H	
Gas/Electric/Propane	Electric	Gas	Electric
Height	37"	37"	37"
Length	37"	37"	37"
Width	20"	20"	20"
Weight	130 lbs	130 lbs	130 lbs
Warranty	2 Years	2 Years	2 Years
Part No. w/D91003 Grinding Disc	G00046	G00048	
Part No. w/160222 TEQ-Lok 4-slot	G00057	G00058	
Part No. w/163367 TL/DT/BO 3-slot			G00142

Standard rotation is RH (right hand) Each Disc comes with new O-ring Isolator 161113



D91003



160222



163367

TEQ-Lok System Tooling

TEQ-Lok (TL-Series) tooling

TEQ-Lok System is a user friendly system for changing tools on grinders and polishers. It allows for quick changing of tools for scraping, grinding and polishing. The tool simply slips into the slot on the adapter plate and is pulled or tapped outward to seat the tool securely. Compatible with Husqvarna Redi Lock System.



TL DIA BUTTON, D911-series

Grit	Soft	Medium	Hard	Ex-Hard
16/18	D91110		D91117	
30/35		D91109	D91112	D91120
60/80	D91115	D91105	D91113	
120/140	D91116	D91106	D91114	



TL DIA SEGMENTS, D911-series

Grit	Medium Bond	Hard Bond	Ex-Hard Bond
16/18		D91118	D91119
20/25	D91103		
30/40	D91104		



TL GP series

Grit/Bond	Round Button		Standard Seg	
	Single Rnd	Double Rnd	Single Seg	Double Seg
18 Soft	162656		162658	163095
18 Med		162794	162659	162799
18 Hard			162660	
30 Soft		163301	163247	
30 Med	162410	162795	162411	162800
60 Soft		163011		
60 Med	162596	162796	162851	
120 Med	162597	162797		
200 Med		162798		



TL Double Arrow Segments

Grit	Ex-Soft	Soft	Medium	Hard	Ex-Hard
6	163371	162744	162745	162746	
16	163283	161975	161978	161981	
30	163284	161976	161979	161982	163372
60		161977	161980	161983	



TL Volcano

Description	Part No.
Volcano S1 30G Med	163227



TL Mini Seg

Description	Part No.
16G Med	161238
30G Med	161162



161162



TL 2CSKT

Description	Part No.
18G Med	162810
30G Med	162811



TL Bow Tie Twin

Description	Part No.
18G Med	163182
30G Med	163183



TL S-Seg

Description	Part No.
16G Med	163275
30G Med	163276





TL Razors

Description	Part No.
30G Soft	163133
30G Med	163161
30G Hard	163134



TL Bead Strippers D91107

Description	Part No.
TL Bead 30G	D91107



TL PentaBead-S 30/40G

Description	Part No.
TL PentaBead	163277



TL Crushed PCD Chips Seg

Description	Part No.
Single Seg Med	162856
2 Seg Med	162490
2 Seg SOFT Bond	162516



TL Carbide Scrapers

Description	Part No.
Mounting Block RH	161641
Mounting Block LH	161704
Carbide 8-sided Chip	160309
Screw – Low Profile	900138



TL Bush Hammer Assembly

Description	Part No.
Bush Hammer – carbide	163485

163485



TL PCD Segment Bar Scraper

Description	Part No.
2-Seg RH	162491
2-Seg LH	162492



162492

TL x9 PCD Scraper


Description	Part No.
x9 PCD RH	163197
x9 PCD LH	163361



163197

TL PCD 2-QRTR RND w/WB

Description	Part No.
RH	162775
LH	162776



162775



TL PCD Whole RND w/ WB

Description	Part No.
Single PCD RH	161788
Single PCD LH	161642
Double PCD RH	162482
Double PCD LH	162483

TL 3" 4-Arrow 4PCD Bearclaw

Description	Part No.
Bearclaw RH	162284
Bearclaw LH	162283





TL 3" Pizza Segs

Description	Part No.
6G Med 10-Seg	162504
16G Med 5-Seg	162905
16G Med 5-Arrow No Bevel Edge	162906
18G Ex-Soft 10-Seg	163198
18G Soft 10-Seg	162476
18G Med 10-Seg	162300
18G Hard 10-Seg	162477
30G Ex-Soft 10-Seg	163199
30G Soft 5-Seg	163037
30G Soft 10-Seg	162453
30G Med 5-Arrow No Bevel Edge	162907
30G Med 5-Seg	163038
30G Med 10-Seg	162301
30G Med 10-Seg No Bevel Edge	162835
30G Hard 5-Seg	163039
30G Hard 10-Seg	162454
60G Soft 10-Seg	162478
60G Med 5-Seg	163040
60G Med 10-Seg	162434
60G Med 10-Seg No Bevel Edge	162836
60G Hard 10-Seg	162479
120G Soft 10-Seg	162480
120G Med 5-Seg	163041
120G Med 10-Seg	162435
120G Hard 10-Seg	162481
200G Soft 10-Seg	162484
200G Med 10-Seg	162485
200G Hard 10-Seg	162486
400G Med 10-Seg	162495



TEQ-Lok Velcro Pad Drivers

The TG8 and the RT8 must use the 2" TEQ-Lok velcro pad drivers for TEQ-Lok tooling.

TL Velcro Pad Drivers

Description	Part No.
2" Pad Driver with Polymer Ring	161165
2" Polymer Ring to rebuild 161165	161621
2" Self-stick Velcro to rebuild 161165	161622
3" Pad Driver with Metal Ring	163234
3" Pad Driver with Polymer Ring	160969
3" Polymer Ring to rebuild 160969	161451
3" Self-stick Velcro to rebuild 160969	161452



161165



160969

TL Transitional Ceramic 3"

Grit	Color	Part No.
30	Purple	162588
50	Green	162589
100	Black	162590
200	Red	162591
400	Yellow	162592
800	Black	162593

Velcro back version on page 23.



TL Adapters and Plates

DITEQ has a wide selection of adapters to use other types of tools on TL machines. To use TL tools on other machines DITEQ has adapters and TL Tool plates to replace the OEM plate on various brand machines.

TL Adapters for other tooling

Description	Part No.
TL Adapter for DT Tooling	163235
TL Adapter for KR Tooling	163489
TL Adapter for MT Tooling	162896
TL Adapter for DMT Tooling	162894



162896

Other Adapters for TL tooling

Description	Part No.
QC Adapter for TL Tooling	163482
DT Adapter for TL Tooling	163471
KR Adapter for TL Tooling	163490
DMT Adapter for TL Tooling	163486



163486

TL Tool Plates

Description	Part No.
TL Tool Plate for 9" Alpha	162015
TL Tool Plate for Innovatech3200	162531
TL Tool Plate for Scanmaskin 13"	162452
TL Tool Plate for Scanmaskin 240mm	162903
TL Tool Plate for 12"DP	161787
TL Tool Plate for 17"	162085
TL Tool Plate for 6 1/2 Sm HTC	162621
TL Tool Plate for EDCO TMC7	163230
TL Tool Plate for EDCO TG10	161638
TL Tool Plate for 10 1/2 HTC	162077
TL Tool Plate for Draygon 21"	162978
TL Tool Plate for Lavina 13"	161637
TL Tool Plate for Lavina Pro-20	161636
TL Tool Plate for Mastercraft	162711
TL Tool Plate shoe for Terrco/STI	162789



163230



162711

DOVETAIL TOOLING

Dovetail DT System Tooling

Dovetail (DT-Series) Tooling

The Dovetail tooling is compatible with the Lavina FCE and EDCO Magnatrap systems. It has a dovetail tapered edge and is held in place by magnets. DITEQ adds to the DT tooling the bolt-on 3 hole trap pattern to add to the versatility



DT Single Round Button (DT1R)

Grit	Soft	Medium	Hard
6			162783
18/20	161903	161908	161913
25	161904	161909	161914
30/40	161905	161910	161915
60/80	161906	161911	161916
120	161907	161912	161917

DT Single Seg (DT1S)

Grit	Medium
18/20	162428
35/40	162305
70	163260



DT Double Round Button (DT2R)

Grit	Soft	Medium	Hard
6		162782	163176
18/20	161918	161923	161928
25	161919	161924	161929
30/40	161920	161925	161930
60/80	161921	161926	161931
120	161922	161927	161932

DT Double Seg (DT2S)

Grit	Medium
18/20	162427
35/40	162304
70	162961



DT Double Arrow Segments

Grit	Ex-Soft	Soft	Medium	Hard	Ex-Hard
6	162340	162343	162346	162349	162352
16	162341	162344	162347	162350	162353
30	162342	162345	162348	162351	162354



DT Double Arrow Opp Dir

Description	Part No.
30G Med Std Dir	162348
30G Med Opp. Dir	162348L



DT Volcano

Description	Part No.
DT S1 30G Med	163226



DT 3" Pizza

Description	Part No.
30G Med 10-Seg	163343



DT Crushed PCD Chips

Description	Part No.
DT 2Seg Med	162595



DT Bead Stripper

Description	Part No.
DT Bead Stripper 30G	D91121



DT Carbide Scrapers

Description	Part No.
Mntg Block RH/LH	162538
Carbide 8-sided Chip	160309
Screw – Low Profile	900138



DT Velcro Pad Driver 3"

Description	Part No.
Pad Driver	162602



DT PCD Segment Bar Scraper

Description	Part No.
2 seg LH	162533
2 seg RH	162532



DT PCD 2 quarter round

Description	Part No.
DTQR PCD RH	162001
DTQR PCD LH	162002
DTQR PCD RH w/ WB	162003
DTQR PCD LH w/ WB	162004



DT Adapters

Description	Part No.
DT adapter for TL tooling	163471
TL Adapter for DT Tooling	163235



DT 3" 4-Arrow 4PCD Bearclaw

Description	Part No.
Bearclaw RH	162680
Bearclaw LH	162679



Bolt-on Adapter for DT (RT8)

Description	Part No.
Bolt-on shoe for DT	162815



DT Bush Hammer Assembly

Description	Part No.
Bush Hammer Assy	163484



162003B3

DT Large Bush Hammer Assy

Description	Part No.
Bush Hammer Assy	162627
Bush Hammer replace	162623
Mounting Plate	162626



Retail Package – 3 Pack

Description	Part No.
161925 DT2R 30/40G Med in 3-Pack	161925B3
162003 DT2QR PCD RH WB in 3-Pack	162003B3
163226 DT S1 30G Med Volcano in 3-Pack	163226B3

Popular packages shown, others available.

DMT Series Tooling

Diamatic Magnetic Trap (DMT) tooling

The DMT tooling is compatible with the Diamatic 3 hole magnetic pin pattern. DITEQ also adds the 3 hole bolt-on trap pattern to increase the versatility.



DMT Double Round Button (DMT2R)

Grit	Soft	Medium	Hard
16	163293	163285	
30/40	162884	162887	162890
60/80	162885	162888	162891
120	162886	162889	162892



DMT Double Seg (DMT2S)

Grit	Soft	Medium	Hard
6		162638	
16		162639	
30/40	162878	162640	162881
60/80	162879	162641	162882
120	162880	162642	162883



DMT Double Arrow Segments

Grit	Ex-Soft	Soft	Medium	Hard
6	162717	162718	162716	162723
16		162719	162643	162724
25			162728	
30		162720	162644	162725
60		162721	162714	162726
120		162722	162715	162727

DMT Carbide Scrapers

Description	Part No.
Mntg Block RH/LH	163042
Carbide 8-sided Chip	160309
Screw – Low Profile	900138



DMT PCD 2 quarter round

Description	Part No.
DMTQR PCD RH	162661
DMTQR PCD LH	162662
DMTQR PCD RH WB	162663
DMTQR PCD LH WB	162664



QCS Series Tooling

The SASE Quick Change System (QCS) tooling

The QCS tooling is compatible with the SASE clip-in system that uses three special screws. The DMT tooling with the QCS screws creates QCS Tooling. One package is 3 screws enough for one tool. Any of the BO 3 hole Trap tooling will work.

QCS Conversion kit (3 screws)

Description	Part No.
QCS Conversion kit	161780



DMT Adapters

DMT Adapters for other tools

Description	Part No.
DMT adapter for TL	163486



Other Adapters for DMT tools

Description	Part No.
TL adapter for DMT	162894



MT Series Tooling

MT (Magnetic Trap) Tooling

The MT tooling is compatible with the Virginia Abrasives, Dr Schultz and several other European Manufacturers 3 hole magnetic pin pattern. The KR-series 3" Pizza Segs also have the MT 3 hole pattern for extra versatility (see p. 19).

MT series tooling

Description	Part No.
Double Round MT2R 6G Hard	163168
Double Seg MT2S 16G Soft	162635
Double Arrow MT-Arrow 16G Soft	163287
Single Seg MT1S 16G Med	163409
Double Seg MT2S 30G Soft	162636
Double Round MT2R 30G Soft	163286
Double Arrow MT-Arrow 30G Soft	163288
Single Seg MT1S 30G Med	163410
Double Seg MT2S 30G Med	163233
Double Round MT2R 60G Soft	162637



TL Adapter for MT tools

Description	Part No.
TL adapter for MT Tooling	162896

National Carpet Equip Tooling

NCE/NGP series tooling



NCE series tooling

Description	Part No.
Triple seg NCE3S 16/18G Soft	163200
Double Seg NCE2S 18G Soft	162430
Double Seg NCE2S 18/20G Hard	162432
Double Seg NCE2S 30G Soft	162431
Double Seg NCE2S 30G Hard	162433
Triple Seg NCE3S 100G Soft	162587
PCD NCE2QR PCD LH WB	162409
PCD NCE2QR PCD RH WB	162408



NGP series tooling

Description	Part No.
Double Seg NGP2S 18/20G Med	163454
Double Seg NGP2S 30G Med	163455



TFW Series Tooling

Terrco Wedge Lock Tooling (TFW Series)

The Terrco wedge lock system has a physically larger wedge than the DITEQ TEQ-Lok or Husqvarna Redi Lock®.



TFW 3" PW4/PW6 Pinwheels

Description	Part No.
TFW PW4 30G Soft	163025
TFW PW6 30G Soft	163029
TFW PW4 30G Med	163026
TFW PW6 30G Med	163030
TFW PW4 60G Soft	163027
TFW PW6 60G Soft	163031
TFW PW4 60G Med	163028
TFW PW6 60G Med	163032



TFW 3" Pizza Segs

Description	Part No.
TFW 6G Med 10-Seg	162505
TFW 18G Med 10-Seg	162298
TFW 30G Med 10-Seg	162299
TFW 60G Med 10-Seg	162414
TFW 120G Med 10-Seg	162415



TFW PCD 2 quarter round

Description	Part No.
TFWQR PCD RH w/ WB	162449
TFWQR PCD LH w/WB	162450



TFW 3" 4PCD Bearclaw

Description	Part No.
Bearclaw RH	162297
Bearclaw LH	162296



Scanmaskin (SM Series) Tooling



SM series tooling

Description	Part No.
SM 2" 3-seg 6G Soft	163118
SM 2" 3-seg 16G Med	162778
SM 2" 3-seg 30G Med	162779
SM 2" 3-seg 60G Med	162780
SM 2" 3-seg 100G Med	162781



162779

QC Series Tooling

Fast Change / Quick Change (QC) tooling

The QC tooling is compatible with the Fast Change Dove Tail Magnetic System.




QC Double Round Button (QC2R)

Grit	Soft	Medium	Hard
18	163059	162930	
25		162931	
30	162926	162634	162932
60	162927	162854	
120	162928	162898	
220	162929	162900	



QC Double Seg (QC2S)

Grit	Medium
18	162899
30	162850
60	162933
120	162934



QC Single Round (QC1R)

Grit	Medium
30	162633
60	162853



QC Single Seg (QC1S)

Grit	Medium
30	162849



QC Arrows

Grit	Medium
18 Single	162981
30 Double	162980



QC PCD 2 quarter round

Description	Part No.
QC2QR PCD RH	163019
QC2QR PCD LH	163020
QC2QR PCD RH w/ WB	163021
QC2QR PCD LH w/WB	163022



QC 3" Pizza Segs

Description	Part No.
30G Med 10-Seg	163127
60G Med 10-Seg	163128
120G Med 10-Seg	163129



QC Adapters

Description	Part No.
QC Velcro Adapter	162901
QC Adapter for TL Tooling	163482



1P-Mag Series Tooling

1P-Mag 3" tooling

The 1-pin magnetic 83mm tooling is on page-5. The center distance to the pin is the same, but for some recessed pockets on the tool Plate, the 3" and the 83mm are slightly different. The KR 3" Pizza tools also come with the 1P-mag (see page 19).



1P-Mag 3" Pizza

Description	Part No.
1P-mag 3" 6G Med 10-seg	162503
1P-mag 3" 18G Med 10-seg	162302
1P-mag 3" 18G Hard 10-seg	162501
1P-mag 3" 30G Soft 10-seg	162764
1P-mag 3" 30G Med 10-seg	162303
1P-mag 3" 30G Hard 10-seg	162502
1P-mag 3" 60G Soft 10-seg	162765
1P-mag 3" 60G Med 10-seg	162499
1P-mag 3" 60G Hard 10-seg	162761
1P-mag 3" 120G Med 10-seg	162500
1P-mag 3" 120G Hard 10-seg	162762
1P-mag 3" 200G Med 10-seg	162763
1P-mag 3" Velcro Pad Driver	162772



KR Series Tooling

Polar Magnetic (KR) tooling

The Polar Magnetic, Draygon or Kutrite tooling uses two larger pins and a magnet to hold the tool in place. DITEQ added the BO 3-hole Trap pattern.



KR Double Seg (KR2S)

Grit	Soft	Medium
16	162563	162565
30	162564	162566



KR Double Arrow (KR2A)

Grit	Soft	Medium
16	162559	162561
30	162560	162562



KR Triple Crescent (KR3)

Description	Part No.
30G General Purpose (Med)	162908
60G General Purpose (Med)	162909
120G General Purpose (Med)	162910




KR 3" Pizza

Description	Part No.
KR 3" 16G Soft 5-seg	163051
KR 3" 16G Med 3-seg	163054
KR 3" 16G Med 5-seg	163052
KR 3" 18G Soft 10-seg	163048
KR 3" 18G Med 10-seg	162857
KR 3" 30G Soft 5-seg No Bevel	162919
KR 3" 30G Soft 10-seg	163049
KR 3" 30G Med 3-seg	163055
KR 3" 30G Med 5-seg	163053
KR 3" 30G Med 10-seg	162858
KR 3" 30G Hard 10-seg	163332
KR 3" 60G Soft 10-seg	163050
KR 3" 60G Med 10-seg	162859
KR 3" 120G Med 10-seg	163056



162919

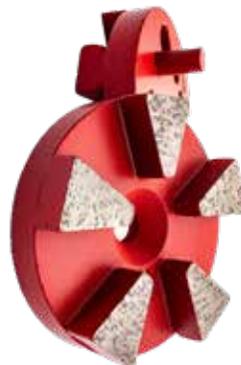

KR Adapters

Description	Part No.
BO 3-Hole Trap Adapter for KR	163453
TL Adapter for KR Tooling	163489
KR Adapter for TL Tooling	163490




Werkmaster Tooling

Werkmaster (WM) tooling



WM Medium Bond

Grit	WM1 SQ	WM1 Egg
16	163178	
30	163179	163180
60		163181

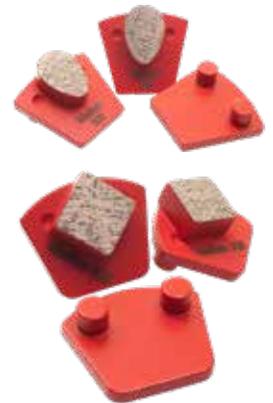

2" Tapered Terrazzo Plugs

T-Plugs 2" Taper in full seg or 3" Pizza seg



T-Plugs 2" Tapered T-Bond/Med

Grit	Full Seg	3" Pizza
20	161196	162398
30	161197	162399
60	161198	162366
120	161199	162400



1" Tapered Plugs are also available

The KR 3" Pizza Segments also have the MT pattern (page 17), 1P-Mag (page 18) and the BO 3-hole Trap pattern. Note that the pin simply unthreads for use as KR tool.

EZC series Tooling

The Wing (EZC) tooling

The EZC tooling is compatible with the HTC EZ Change system.



EZC Single Round Button (EZC1R)

Grit	Soft	Medium	Hard
18	161933	161938	161943
25	161934	161939	161944
35/40	161935	161940	161945
60/80	161936	161941	161946
120	161937	161942	161947
180/200		162281	



EZC Double Round Button (EZC2R)

Grit	Soft	Medium	Hard	Ex-Hard
18	161948	161953	161958	162755
25	161949	161954	161959	
35/40	161950	161955	161960	
60/80	161951	161956	161961	
120	161952	161957	161962	
180/200		162282		



EZC Double Arrows

Grit	Soft	Medium	Hard
18	162568	162572	162576
30/40	162569	162573	162577
60/80	162570	162574	162578
120	162571	162575	162579



EZC Double Seg (EZC2S)

Description	Part No.
30/40G Hard Bond	163191




EZC single PCD w/ WB

Description	Part No.
EZC1PCD RH WB	162323
EZC1PCD LH WB	162324



EZC 5 point PCD

Description	Part No.
EZC5PCD RH	162321
EZC5PCD LH	162322



EZC 3" Velcro Pad Driver

Description	Part No.
For 3" Velcro backed tooling	162771



162771

EZC Resin

Description	Part No.
50G	163248
100G	163249
200G	163250
400G	163251
800G	163252
1500G	163253
3000G	163254



Fixed Grinding Plates

10" Grinding plates for EDCO TG10, Husqvarna Dual Track, MK, Blastrac, and others.



10" Grinding Discs

Description	Part No.
FGG-15 10" x 10Seg	D91002
FGG-25 10" x 20Seg Arrow	D91034
FGG-25 10" x 20Seg	D91001
FGG-28 10" x 20Seg Asphalt	D91010
TL Tool Plate 10" x 6Slot	161638



8" Grinding Discs

Description	Part No.
FGG-34 8" (10 seg) 30/40 Med	D91003
FGG-36 8" (10 seg) 30/40 Hard	D91009
TL 4-slot for TG8 only	160222
TL 3-slot/DT for RT8 only	163367
O-ring Isolator	161113



Blocks

EDCO Wedge Block/Plate

Description	Part No.
30/40G GP Diamond Block	161457
30/40G GP Diamond Plate	161182



Carbide Chips

Carbide Chips

Description	Part No.
Carbide 8-sided, 1"sq	160309
Carbide 4-Sided Bevel, 1"sq	162732
Carbide 8-Sided 3/4"sq	162713




TG8/TG18 VB Module System



VB Module System


Description	Part No.
TG8 Plate with Hub (14Modules)	162026
TG18 Plate (20 Modules)	162018
VB Module 30L 35G	162019



CPM8 Drum and TCT Flails

Drop-in Replacement EDCO CPM8 Drum Assy

163196 DRUM CPM8 Complete GP setup: Drum (163194), Retaining Plates x2 (163195), Shafts x6 (160988), TCT Flails x78 (160203) and spacers x215 (160920).

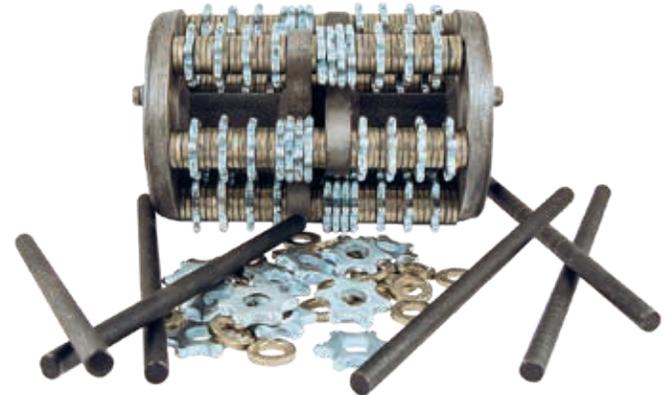

CPM8 drum rebuild items a-la-carte

Description	Part No.
Drum Complete (GP setup) Drop in Replacement	163196
Cutters and Shafts kit (same as 163196 but no drum)	161434
Drum Only	163194
Drum with Shafts and retaining plates	163143
Retaining Plates	163195
TCT Flail cutter (TCT 6T 44x16x6)	160203
Shafts (Case Hardened Alloy Steel)	160988
Spacer	160920

Bolt-on Bush Hammers

Fits on TG12 and TG18 Tool Plates (x3 each)

Bush Hammer

Description	Part No.
Bush Hammer	162623



2" Velcro backed tooling

2" Semimetal Resins (aka Hybrids)

Grit	
30G	161166
50G	161167
100G	161168
200G	161588
400G	161590



161167



2" DRY-Only Resins

Grit	
30G	161169
50G	161170
100G	161171
200G	161172
400G	161173
800G	161174
1500G	161175
3000G	161176



161174



2" VB Lippage Pads

Grit	
24G	162777
30G	161603
50G	161604
100G	161605
200G	161606
325G	162031



161604



161165


2" Accessories

2" TL Velcro Pad Driver (Rebuildable Polymer Ring)	161165
--	--------

3"/83mm Velcro Backed Tooling

3" MB-Series Resin

Grit	
50G	300405
100G	300410
200G	300415
400G	300420
800G	300425
1500G	300430
3000G	300435



3" Super Premium

Grit	Epoxy	Phenolic
30G	160906	161051
50G	160907	161052
100G	160908	161053
200G	160909	161054
400G	160910	161055
800G	160912	161056
1500G	160913	161057
3000G	160914	161459



3" FLX series

Grit	FLX
30G	162816
50G	162681
100G	162682
200G	162683
400G	162684
800G	162685
1500G	162686
3000G	162687



161165



3" Typhoon*

Grit	Typhoon-Pro	Typhoon
50G Hybrid	161750	
100G Hybrid	161751	
200G Hybrid	161752	
30G		163294
50G	161743	162766
100G	161744	162767
200G	161745	162734
400G	161746	162735
800G	161747	163295
1500G	161748	163296
3000G	161749	163297



*Typhoons are a True 3" Diameter

3" Resin Prem for Terrazzo

Grit	
30	161643
50	161644
100	161645
150	161646
200	161647
400	161648
600	161649
800	161650
1500	161651
3000	162652
Buff	161653



also used for concrete, heavy exposed aggregate, and transitional

3" Rosette

Grit	
200	163123
400	163124
800	163125
1500	163126



3" XP 80x3mm Slim

Grit	XP Slim
50G	163421
150G	163422
300G	163423
500G	163424
1000G	163425
2000G	163426
3000G	163427



**great for vertical wall polishers*

3" Semimetal Resins (aka Hybrids or Coppers)

Grit	SuperPrem	Prem
30G	161012	130370
50G	161013	130371
100G	161014	130372
200G	161015	130373
400G	161992	130374



3" Transitional Ceramic

Grit	SuperPrem	Prem
30G Purple	162580	162674
50G Green	162581	162675
100G Black	162582	162676
200G Red	162583	162677
400G Yellow	162584	162678



3" VB Lippage Pads

Grit	
24	160997
30	160934
50	160935
100	160936
200	160937
325	160938



3" Sintered Metal (Wet)

Grit	
30G	161017
50G	161018
70G	161019
120G	161020



3" Flex Metal Dots

Grit	
30G	162609
50G	162601
100G	162610
200G	162611



3" Accessories

3" Foam Riser	161016
3" Rigid Aluminum Pad Driver 5/8-11 Threaded	130522
3" 1P MAG-83mm Velcro Pad Driver	300599
3" 1P MAG-3" Velcro Pad Driver	162772
3" BO Velcro Pad Driver	700120
3" TL Velcro Pad Driver (Rebuild-able Polymer Ring)	160969
3" TL Velcro Pad Driver (Metal Ring)	163234
3" DT Velcro Pad Driver	162602
3" QC Velcro Pad Driver	162901
3" EZC Velcro Pad Driver	162771

VELCRO BACK POLISHING PADS

4" to 7" Velcro backed tooling

Vac Brazed Sanding Pad (Wet/Dry)

Grit	4"	5"	7"
50	161542	160633	161882
70	161543	160634	161883
120	161544	160635	161884
220	161545	160636	161885
400	161546	161880	161886
600	161547	161881	161887



VB Lippage Pads


Grit	4"	5"
24/25	160989	160980
30	160990	160981
50	160991	160982
100	160992	160983
200	160993	160984
325	160994	160985



160980

Copper (Hybrid) Pad

Grit	4"	5"
30	161897	160915
50	161898	160916
100	161899	160917
200	161900	162006
400	161901	



Flex Metal Dots

Grit	5"	6"
30	162294	162534
50	162295	162535
100	162439	162536
200	162440	162537



'Ceramic' Resin

Grit	5"	7" Rings
C1	161157	161150
C2	161158	161151
C3	161159	161152
C4	161160	161153



Dry Only. Critically Hard Slab Surface.

Resin Concrete Polishing Everyday Pads

Grit	5" Wet	5" Wet/Dry
30	162598	162742
50	161664	161654
100/120	161665	161655
200/220	161667	161657
400	161668	161658
800	161670	161660
1500/1800	161671	161661
3000/3500	161672	161662
Buff	161673	161663



161665

Resin (Wet/Dry) Concrete Polishing Pads

Grit	4"	5"	7" Full	7" Ring
30	162741	162598		161034
50	162736	160282	161214	161035
100/120	162737	160283	161215	161036
200/220	162738	160284	161216	161037
400	162739	160285	161217	161038
800	162740	160286	161219	161039
1500/1800		160288	161220	161040
3000/3500		160289	161221	161041



130335

130511



130120

4" to 7" Misc Accessories

5" Foam Riser Pad	160632
7" Foam Riser Ring	162893
4" Standard Flex Pad Driver 5/8-11 Threaded	130120
4" Extreme Flex Pad Driver 5/8-11 Threaded	130510
4" Rigid Aluminum Pad Driver 5/8-11 Threaded	130511
4" Rigid Pad Driver 5/8-11 Threaded	130335
4" Flat Flex Pad Driver 5/8-11 Threaded	130338
5" Standard Flex Pad Driver 5/8-11 Threaded	130121
5" Rigid Aluminum Pad Driver 5/8-11 Threaded	130512
7" Standard Flex Pad Driver 5/8-11 Threaded	130520
7" Rigid Aluminum Pad Driver 5/8-11 Threaded	130521

Transitional Ceramic

Transitional Ceramic Cup Wheel, 5/8-11 Thread

Grit	5" BLK	7" BLK	5" RL	7" RL
30	163110	163111	163472	163477
50	162837	163108	163473	163478
100	162838	162839	163474	163479
200	163089	162840	163475	163480
400	163090	163109	163476	163481



S-Segment Cup Wheel

S-Seg

	20Grit	40Grit
4" x 5/8-11	D81075	D81079
5" x 7/8-5/8	D81076	
7" 5/8-11	D81077	
7" 7/8-5/8	D81078	D81080



VB Beads and Spikes



DITEQ VB Beads and Spikes tear through soft coatings without clogging.

VB Spike 162020, 162022, 162024 have a silent core.



162444

162022
Silent Core

162834

VB Beads and Spikes, 35G, 7/8" arbor

	4"	4.5"	5"	7"
VB BEAD	162443		162444	162445
VB Spike		162020*	162022*	162024*
VB Spike II	162832		162833	162834

*Silent Core

Adapter 7/8" to 5/8-11 Threaded (130117)

PCD Cup Wheels

PCD Cup Wheels

4" x 9N x 5/8-11 & 7/8	D83203
5" x 8N x 5/8-11	D83205
5" x 4N x 7/8	D86205
7" x 12N x 5/8-11 & 7/8	D83204
7" x 6N x 7/8	D86206



Blue Storm (T-Seg) Cup Wheel

CST34 Storm

	5/8-11	7/8-5/8
4"	D81020	D81019
4.5"	D81022	D81021
5"	D81024	D81023
7"	D81026	D81025



Arrowhead

Arrowhead

4" x 5-seg x 5/8-11	D81066
4" x 5-seg x 7/8-5/8	D81065
5" x 6-seg x 7/8-5/8	D81067
7" x 10-seg x 5/8-11	D81072
7" x 10-seg x 7/8-5/8	D81071



Everyday Cup Wheels

Single Row (CS), Double Row (CD) and Turbo (CST)

The Single Row CS-14, Double Row CD-14 and Segmented Turbo CST-13 are all Standard Grade, The Segmented Turbo CST-23 is Premium Grade and the Single Row CS-33 and Double Row CD-33 are Super Premium. DITEQ has numerous cup wheels but these are currently the popular choices.

Segmented Cup Wheels

4" CS-14 x 7/8-5/8	D80001
4" CS-14 x 5/8-11	D80002
4" CD-14 x 5/8-11	D80007
4" CD-33 x 7/8-5/8	D80016
4" CST-13 x 18-seg x 5/8-11	D81049
4" CST-13 x 9-seg x 5/8-11	D81035
4" CST-23 x 10-seg x 5/8-11	D81002
4.5" CS-14 x 5/8-11	D80029
4.5" CD-14 x 5/8-11	D80030
4.5" CD-33 x 5/8-11	D80032
4.5" CST-13 x 18-seg x 5/8-11	D81053
4.5" CST-13 x 9-seg x 5/8-11	D81051
4.5" CST-23 x 9-seg x 5/8-11	D81028
5" CS-14 x 5/8-11	D80023
5" CD-14 x 5/8-11	D80024
5" CD-14 x 7/8-5/8	D80008
5" CD-33 x 7/8-5/8	D80018
5" CST-23 x 12-seg x 5/8-11	D81003
7" CS-14 x 5/8-11	D80005
7" CS-33 x 7/8-5/8	D80014
7" CD-14 x 5/8-11	D80010
7" CD-33 x 7/8-5/8	D80019
7" CD-33 x 5/8-11	D80020
7" CST-13 x 24-seg x 5/8-11	D81056
7" CST-23 x 12-seg x 5/8-11	D81005
7" CST-23 x 12-seg x 7/8-5/8	D81004
7" CST-23 x 24-seg x 5/8-11	D81009



Continuous Turbo Cup (CTC)

	Fine	Med	Course
4" CTC-32 x 5/8-11	D82006	D82004	D82002
5" CTC-32 x 5/8-11	D82018	D82016	D82014
7" CTC-32 x 5/8-11	D82030	D82028	D82026

Compatible with Competition

EDCO TMC-7

7" CST-13 x 24-seg x 7/8-5/8 cup wheel w/ DP 161597

7" TL Tool Plate x 3-slot w/ BO 3-hole Trap pattern w/ DP 163230

More available, ask your DITEQ rep for information



163230

L/P Series for Hilti

4.5" x 5/8-11 6-seg D81088

5" x 5/8-11 7-seg D81089

6" x 3/4" arbor Turbo Cup D81083

6" x 3/4" arbor 8-seg 40Grit D81085

6" x 3/4" arbor 8-seg 80Grit D81087

6" x 3/4" arbor PCD 6N D83206



JS-S Jet Stream

Jet Stream

4" x .080" x 7/8-5/8 D96403

4.5" x .080" x 7/8-5/8 D96404

5" x .080" x 7/8-5/8 D96405

6" x .080" x 7/8-5/8 D96406

7" x .080" x DM-7/8-5/8 D96407

8" x .080" x DM-7/8-5/8 D96408

9" x .095" x 7/8-5/8 D96409

10" x .110" x 7/8-5/8 D96410

12" x .125" x 1"-20mm DP D96401

14" x .125" x 1"-20mm DP D96402



Anycut Flush Wheel

Cutting off studs in slab

4.5" x .125" x 7/8 Flush D11308

5" x .125" x 7/8 Flush D11309

Adapter Flush cut (130122)



VB Diamond Grinding Wheels



Vacuum Brazed bell shape with 7/8" arbor

	4.5"	7"
Position 0 (25 Grit)	161027	161021
Position 1 (30 Grit)	161028	161022
Position 2 (40 Grit)	161029	161023
Position 3 (50 Grit)	161030	161024
Position 4 (100 Grit)	161031	161025
Position 5 (200 Grit)	161032	161026

Adapter 7/8" to 5/8-11 Threaded (130117)

Dust Shrouds – Cutting

Cutbuddie III

	p/n
5" Cutbuddie III	161781
7" Cutbuddie III	161782

See page 35 for additional Information



Dust Shrouds – Grinding

XP Dustbuddie

	p/n
5" XP Dustbuddie (w/ 160091)	162456
7" XP Dustbuddie (w/ 160091)	162457

See page 35 for additional Information



Dustbuddie

	p/n
5" Dustbuddie in Clamshell (No Hose)	162437
7" Dustbuddie in Clamshell (No Hose)	162438

See page 35 for additional Information



Dustie

	p/n
5" Dustie (No Hose)	160321
7" Dustie (No Hose)	160322

See page 35 for additional Information



Connecting Shrouds to Vac

Connection Hose for Dustless vacs	160091
Connection items for Nacecare vacs (Stub and Red Cuff)	161108 & 160823

See page 27 for the shrouds



160091



Vacuum Brazed Bits – Counter Tops

S23V-C VB Core Bit

1-1/8" Diameter	D66232
1-1/4" Diameter	D66233
1-3/8" Diameter	D66235
2" Diameter	D66236

Popular sizes shown. Many more bits available



Dust Shrouds – Coring

Bitbuddie

	p/n
Up to 1-3/8 bits	160220
1-4" dia	160979
2-8" dia	161625

See page 35 for additional Information



Contractor Series

The Eagle by DITEQ Contractor series burnishers are the best value on the market. They are constructed of a rugged durable cast aluminum deck. They feature the **ProCarb™** carburetor and **E-Zero™** emissions shutdown.

Use wet or dry.

Contractor

Specifications:

Disc Size	21"	27"
Engine	18HP Kawasaki Propane	18HP Kawasaki Propane
Disc RPM	1800 rpm	1800 rpm
Production per hour	23,000 sf/hour	30,000-35,000 sf/hour
Weight	250 Lbs	350 Lbs
Part No.	300234	300236

Eagle
by DITEQ



Dust Control Series

The Eagle by DITEQ Dust Control are constructed of a rugged durable cast aluminum deck. They feature the **ProCarb™** carburetor and **E-Zero™** emissions shutdown. Dust shroud can use dust filter bag or 2" port for external vacuum.

Use wet or dry.

Dust Control

Specifications:

Disc Size	27"
Engine	18HP Kawasaki Propane
Disc RPM	1800 rpm
Production per hour	30,000-35,000 sf/hour
Weight	330 Lbs
Part No.	300126



Propane Tanks

The Steel Tank is an industry standard and comes with the PRO Line machines. Optional lighter weight aluminum tank (15Lbs lighter) is available

Propane Tanks

Part No.	Description.
1705	Steel Tank
680053	Aluminum Tank



680053

EnviroPro Series

The Eagle by DITEQ EnviroPro series are ideal for achieving optimum shine on concrete using DIP and Black Abrasive Pads. The weighted EnviroPro elevates the floor temperature for maximizing gloss finishes. A unique shroud design helps collect the dust passively. The machine also comes with a 2" vac port. The WB stands for Weighted Burnisher, it includes a 15lb deck weight and metal pad driver.

It is constructed of a rugged durable cast aluminum deck. It features the **ProCarb™** carburetor and **E-Zero™** emissions shutdown.

Use wet or dry.

EnviroPro

Specifications:

Disc Size	27" EnviroPro WB
Engine	18HP Kawasaki Propane
Disc RPM	1800 rpm
Production per hour	33,000 sf/hour
Weight	380 Lbs
Part No.	300116



Eagle
by DITEQ

AquaBuff Series

The Eagle by DITEQ was the first Burnisher designed for using the diamond (DIP) pads with lower disc speeds and higher torque, to be able to operate the diamond pads at full throttle with max power. Integral water tank for wet grinding with the DIP and abrasive pads. High head pressure to elevate floor on final buff for maximizing gloss finishes.

The AquaBuff is constructed of a rugged durable cast aluminum deck. It features the **ProCarb™** carburetor and **E-Zero™** emissions shutdown.

Use wet or dry.

AquaBuff

Specifications:

Disc Size	21"	27"
Engine	18HP Kawasaki Propane	18HP Kawasaki Propane
Disc RPM	900 rpm	900 rpm
Production per hour	6,000 sf/hour	7,500 sf/hour
Weight	350 Lbs	350 Lbs
Part No.	200239	200242





Electric 20" Pro Burnisher

The DITEQ PRO 120v 20" Electric burnisher is in a class by itself. No longer limited by an ODP (Open Drip Proof) DC Rectified motor commonly found in "standard" models, the DITEQ PRO model uses a TEFC (Totally Enclosed Fan Cooled) AC electric motor with dual capacitors. The AC motor has a quieter operation, is more durable (longer overall life), no carbon brushes, the AC motor produces less heat, the TEFC protects better against moisture and dust damage to the internal working components of the motor, and it maintains a much more consistent RPM even with aggressive tooling/pads.

Use wet or dry.

Electric 20" Pro Burnisher

Model No.:	DITEQ Pro 20
Pad Size	20"
Disc RPM	1250 rpm
Weight	90 lbs
Motor	1-1/2HP AC
Volt/Amp	120v / 14.5A
Noise Level	58 dB
Part No.	G00141



G00141

Swing Machines

Swing Machine – Standard Duty 175's

Model No.:	Eagle 17"	Eagle 20"
Pad Size	17"	20"
Disc RPM	175 rpm	175 rpm
Weight	94 lbs	97 Lbs
Motor	1-1/2HP AC	1-1/2HP AC
Volt/Amp	120v / 5.9A	120v / 6.5A
Noise Level	60 dB	60 dB
Part No.	G00103	G00111

Optional Equipment Standard Duty

Model No.:	Eagle 17"	Eagle 20"
Water Tank Kit	162247	162247
Splash Guard Shroud	163352	163402
Dry Vac Shroud	163396	163398
Brush (Poly Bristle)	162223	163368
Brush (Soft Shampoo)	162271	
Plate – Pad Driver	162270	163369
Plate – Pad Driver Econ	162710	

Pro Swing Machine – Heavy Duty

Model No.:	DITEQ Pro 17"	DITEQ Pro 20"
Pad Size	17"	20"
Disc RPM	165 rpm	165 rpm
Weight	123 lbs	125 Lbs
Motor	1-1/2HP TEFC	1-1/2HP TEFC
Volt/Amp	120v / 7.9A	120v / 8.4A
Noise Level	66 dB	66 dB
Part No.	G00140	G00145

Optional Equipment Pro Heavy Duty

Model No.:	DITEQ Pro 17"	DITEQ Pro 20"
Water Tank Kit	162247	162247
Splash Guard Shroud	163352	163402
Dry Vac Shroud	163397	163399
Brush (Poly Bristle)	162223	163368
Brush (Soft Shampoo)	162271	
Weight Kit (50 Lbs)	163346	163346
Plate – Pad Driver	162270	163369
Plate – Pad Driver Econ	162710	
Plate – Diamond Tooling	163350	163370
Plate – Orbitec	163351	163400
Plate – Carbide Stripping, (Includes set of 160309 Carbides)	162870	163401



G00140



163350 & 162870 (for heavy duty pro swing machine only)

BURNISHER PADS

Burnisher Pads

DITEQ offers many different types of Pads for Burnishers/Bufferers in addition to these common Pads.



300191

Floor Pads (non-diamond)

Floor Pads (Box of 5)

FL Pad	12"	13"	14"	15"	16"	17"	20"	21"	24"	27"
White (Soft)	A70030B.	A70022B.	A70050B	A70027B	A70032B	A70004B	A70014B	A70016B	A70020B	A70018B
Black (Abr)	A70029B	A70021B	A70048B	A70026B	A70031B	A70003B	A70013B	A70015B/51B	A70019B	300209B
Hogs Hair	A70040B	A70041B		A70042B		A70043B	A70044B	A70045B	A70046B	A70047B
Blue								300189B	300190B	300191B
Red	A70034B	A70024B	A70049B	A70028B	A70033B	A70039B	A70025B	A70036B		A70037B
Green		A70023B		A70035B				A70038B		

Diamond Impregnated Pads (DIP)

DIP-M for Maintenance Pads on already Polished Concrete and Stone

DIP-M (Sold Individually)

FL Pad	12"	13"	17"	20"	21"	24"	27"
200G			163392			163236	
400G			163385			163237	161283
800G	161252	161253	161256	161257	161258	161824	161259
1500G	161260	161261	161264	161265	161266	161825	161267
3000G	161268	161269	161272	161273	161274	161826	161275
Buff						163238	

DIP-M/Twister Pads (Box of 2)

FL Pad	21"	24"	27"
400G RED	200630	200631	200632
800G WHT	200633	200634	200635
1500G YLW	200636	200637	200638
3000G GRN	200639	200640	200641

Diamond Impregnated Pads for Restoration (DIP-R)

DIP-R Restoration Pads (More Aggressive than M) to Polish Concrete

DIP-R (Sold Individually)

FL Pad	13"	17"	20"	21"	24"	27"
200G					163239	161888
400G	161293	161295	161296	161297	161298	161299
800G	161301	161303	161304	161305	161306	161307
1500G	161309	161311	161312	161313	161314	161315
3000G	161317	161319	161320	161321	161322	161323
Buff	161325	161327	161328	161329	161330	161331



FP and DIP-Dots

FP-series is comparable to the Fenix Pads. Used to polish concrete.

FP (Sold Individually)

FP	9"	11"	17"
50G	163144	163151	163268
100G	163145	163152	163269
200G	163146	163153	163270
400G	163147	163154	163271
800G	163148	163155	163272
1500G	163149	163156	163273
3000G	163150	163157	163274



DIP-Dot (Sold Individually)

DIP-Dot Pad	13"	17" Marble
50G	163218	163386
100G	163219	163387
200G	163220	163388
400G	163221	163389
800G	163222	163390
1500G	163223	163391
3000G	163224	



DIP-Dot use WET only

Sanding Screens

17" Screens (10-Pack)

Grit	p/n
60G	163315
80G	163316
100G	163317
120G	163318
150G	163319

Densifiers

DITEQ offers both Sodium and Lithium Densifiers.

Sodium Densifier

Size	p/n
5 gallon RTU	690152
55 gallon RTU	300239

Lithium Densifier

Size	p/n
5 gallon RTU	163429
1 gallon – Concentrate	163430

Lithium Concentrate dilute 1:4 with water.

RTU is Ready to Use.

Impregnators and Guards

The Guards and Impregnators perform the same basic function of adding a level of stain protection on polished concrete and stone surfaces from water or oil based spills. The impregnators are synergistic and the Guard is semi-topical.

Water Based Impregnators – Low VOC, use on porous stone or polished concrete for matte gloss (400 to 800G)

Solvent Based Impregnators – Dense Stone, heavy exposed aggregate, or polished concrete >1500G.


Guard Sealer will increase gloss surface levels.

Impregnators

Size	p/n
1 gallon water based	163446
1 gallon solvent based	163447

Guard

Size	p/n
1 gallon Guard Sealer	163448

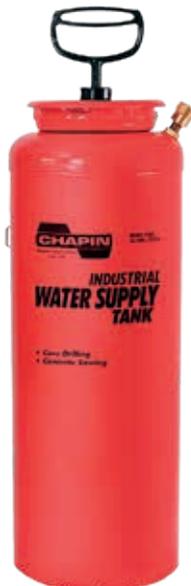

151055

Sprayer

Sprayers and Pump Cans

Water Tank Standard	151055
Sprayer Pump-up for Cure-N-Seal	151470
Sprayer – Acetone	160945
Sprayer – Acid	160946

DRY VACUUMS AND DUST CONTROL

The DROID 600 HEPA Vacuum

The Dustless DROID 600 is a HEPA vacuum with 600CFM airflow. It is dual voltage 120v or 220v single phase, it has a cyclonic pre-separator and uses standard drum bags

Dustless DROID 600 HEPA Vacuum

HEPA rated Filter	99.97%
Cyclonic Pre-Separator	Removes 90% dust from air stream
Motor	Dual 2HP (120v each)
Voltage	120v/14A x2 or 240v/14A
Air Flow / Lift	600 CFM / 90" Lift
Noise Level	79 dB
Drum Capacity	30Gal uses standard bags
Hose (Included)	3" x 25Ft
Dimensions (LxWxH)	60"x24"x75"
Part No.	161682



Dustless
TECHNOLOGIES

The Dual Motor Dry Vacuum

The Nacecare dual motor fine dust vac uses a cloth primary filter and a Tritex tamborine HEPA filter. Vacuum comes with a 2" x 15Ft hose and cuff kit (ND5) and optional combo unit includes wand with 1-1/2 x 8Ft wand hose.

NDD900

HEPA rated Tritex Filter	99.97%
Motor (2-stage)	2x 800W
Voltage	120v/14A x2
Air Flow / Lift	200 CFM / 100" Lift
Noise Level	67 dB
Drum Capacity	12Gal uses disposable cloth filter
Hose (Included)	2" x 15Ft with cuff kit
Part No. with ND5 hose & cuff kit	160799
Part No. as Combo with ND5 & Wand	162242

NACECARE
SOLUTIONS



Options for Nacecare 160799 Vacuum

Filter Bag Microflo 5-Pack	160814
Filter Bag Standard 10-Pack	160839
ND5 Hose (2" x 15Ft) and Cuff Kit	161587
Y-Connector	162793
Wand Kit Dry (1-1/2 x 8Ft Hose)	160801
1-1/2 x 15Ft Wand Hose	162269
1-1/2 x 20Ft Wand Hose	162320
1-1/2 x 50Ft Wand Hose	162363
HEPA Module for EPA compliance	160812
Mounted 29' Brush Bar	160818



Industrial Henry HEPA Dry

The industrial Henry (Tradeline series) TEL390 Vacuum 120CFM, 100" Lift, 18Lbs, 47dB noise level, 33Ft Electrical cord. It comes with Wand kit. Uses a Bag as primary filter. Two models, both HEPA to meet OSHA requirements and one HEPA with Certificate for EPA compliance.

TSP390/TEL390

Vacuum	p/n
TSP390 HEPA	163381
TEL390 HEPA for EPA	163300
Filter Bag (10-Pack) TEL390	162813



Dustless 8Gal HEPA Dry Pro

The Dustless 8Gal HEPA Dry Pro weighs only 38Lbs and has 138CFM / 83" Lift.

Dustless 8Gal HEPA Dry Pro

Vacuum	p/n
8 Gal HEPA Dry Pro	163299
Filter Bag – 2-Pack	163337
Filter HEPA	163338



Dustless WD 16Gal and HEPA Dry 16Gal

The Dustless Wet/Dry (WD) vacuum has been in the industry for many years. It has 116CFM / 72" Lift.

Dustless 16Gal

Vacuum	p/n
WD 16Gal	162251
HEPA Dry 16Gal	162252
Filter Bag – 2-Pack	160123



Nacecare Henry HEPA Jobsite Cleanup vacuum

The Henry Vacuum is an icon in the industry. It weighs only 15Lbs, it has HEPA filtration at 120CFM.

Henry Dry HEPA PPR240

Vacuum	p/n
Henry Dry HEPA with Wand Kit	162245
Filter Bag (10-Pack)	162246



Dry Dust Accessories

Hoses and Cuffs are nominal size (+/-).

Nacecare hoses have same threaded connection.

Common Vacuum Hoses

Hose, 2" x 12-1/2Ft Dustless w/Dustless Coupler	162918
Hose, 2" x 25Ft Dustless w/Dustless Coupler	160093
Hose 2" x 15Ft Nacecare threaded F/F	160813
Hose 2" x 25Ft Dustless Pro with soft Cuffs	163415
Hose 2" x 50Ft Dustless Pro with soft Cuffs	161585
Hose 2" x 25Ft with soft Cuffs	680551
Hose 2" x 50Ft with soft Cuffs	700020
Hose 2-1/2" x 25Ft with soft Cuffs	162526
Hose 3" x 10Ft w/ soft Cuffs (incl-sleeve to daisychain)	162379
Hose 3" x 25Ft Dustless Droid Hose	162525



Y connectors and Misc Vac Adapters

Y-connector for Nacecare vacs threaded hoses	162793
Y-connector for Dustless Vacs (2"x2"x2")	160105
Dustless hose cuff for TG-8 Grinders	162029
Hose coupler 2" barbed	163413
Hose coupler 3" barbed	162527
Splitter 3-way (2x2x2)	200570
Splitter 3-way (2.5x2x2)	162429
Splitter 3-way (3x2.5x2.5)	162941
Splitter 3-way (3x3x3)	162940
Adapter 3" hose (plug style) to Nacecare threaded	162979

Connecting Shrouds to Vac

Connection Hose for Dustless vacs	160091
Connection items for Nacecare vacs (Stub and Red Cuff)	161108 & 160823

See page 27 for the shrouds



WET VACUUMS AND SLURRY CONTROL

40 Gallon Battery Vacuums

Slurry wet vacuum for heavy duty use. Picks up heavy concrete slurry with a 40 gallon recovery tank. Battery powered (standard 2x115Ah wet acid with optional 250Ah Lithium-Ion). Strong suction 3-stage vacuum motors with 140CFM flow. Easy gravity discharge with large 3" drain hose

Slurry Vac, 40Gal Battery

Specifications:	Standard	Optional Li-Ion
Tank Capacity	40 Gallon	
Air Flow	140 CFM	
Vacuum Motors	3-Stage High Lift 2x24v DC	
Battery	2x 115Ah Wet Acid	250Ah Li-Ion
Weight	400 lbs	
Part No.	701211	701211-Lith



Drum Top Slurry Vacuums

Nacecare Drum Top Vacuum, Head and Wand, Drum not included (30 or 55G drum)

Specifications:	Single Motor	Dual Motor
Vac Motor	120v / 10A	120v / 20A
Power cord	42 FT	42 FT
Water Lift	100"	100"
Air Flow	95 CFM	160 CFM
Noise Level	64 dB	64 dB
Hose and Wand	1-1/2" x 8Ft	1-1/2" x 8Ft
Part No.	162211	162212



Dustless Drum Top Slurry Vac, Head and Hose only or Complete with Cart, Wand and Drum

Specifications:	Single Motor	Single Motor
Vac Motor	120v / 13A	120v / 13A
Power cord	15 FT	15 FT
Water Lift	124"	124"
Air Flow	114 CFM	114 CFM
Hose Length	1-1/2" x 25FT	1-1/2" x 25Ft w/Wand
Cart		2 Wheels and castor
Part No.	100554	100553



Wet Vacuums



Wet Vacuum with Wand

Model No.:	WV370	WV570	WV900	WV1800	WV1802P	WV2900	WV5500
Capacity	4 Gallon	6 Gallon	12 Gallon	20 Gallon	20 Gal w/ Pump	29 Gallon	55 Gallon
Water Lift	100"	100"	100"	100"	90"	117"	117"
Air Flow	95 CFM	95 CFM	95 CFM	95 CFM	160 CFM	112 CFM	112 CFM
Weight	19 Lbs	34 Lbs	44 Lbs	81 Lbs	90 Lbs	80 Lbs	94 Lbs
Volt/Amp	120v / 10A	120v / 10A	120v / 10A	120v / 10A	120v / 13.3A (Vac Only) or 17.5A (Vac & Pump)	120v / 10.7A	120v / 10.7A
Noise Level	64 dB	64 dB	64 dB	64 dB	67 dB	68 dB	68 dB
Hose and Wand	1-1/2" x 8Ft	1-1/2" x 15Ft	1-1/2" x 15Ft				
Part No.	162747	162975	160825	161552	162204	163347	163349



Wet Vac w/ Mounted Squeegee Bar

Model No.:	WV900	WV1800
Capacity	12 Gallon	20 Gallon
Water Lift	100"	100"
Air Flow	95 CFM	95 CFM
Weight	44 Lbs	81 Lbs
Volt/Amp	120v / 10A	120v / 10A
Noise Level	64 dB	64 dB
Part No.	160802	160838



162204



Items for Nacecare Vacuums

Filter 14" Primary Nylon (use instead of Ball Float Assy)	160829
Filter 14" Secondary Nylon (use with Ball Float Assy)	162088
Filter, FL Pad 13"	A70022
Wand Kit Wet (1-1/2 x 8Ft Hose)	160824
1-1/2 x 15Ft Wand Hose	162269
1-1/2 x 20Ft Wand Hose	162320
1-1/2 x 50Ft Wand Hose	162363
Mounted 29' Squeegee Bar for 12 Gal (WV900)	160826
Mounted 29' Squeegee Bar for 20 Gal (WV1800)	161553

Nacecare Other Wet Vacuums

Vacuum WV900 with BB8 W/D kit	162235
Vacuum WV900 with Combo (Wand and Mounted Bar)	162239
Vacuum WV1800 with Combo (Wand and Mounted Bar)	162240
Vacuum WV1802 (2 Motor) with Combo	162241

Items for DITEQ 29 and 55 Gallon Vacuums

Wand Kit Wet (1-1/2 x 15Ft Hose)	163375
Foam Filter Sleeve (2-pack)	163437
Bag Non-Pleat Washable	163377

Rideable Scrubbers



TGB2120
G00130



TGB2128
G00131




TTV678
G00132

Rideable Industrial Scrubbers

	TWINEC TGB2120	TWINEC TGB2128	TWINEC VARIO/ TTV678
Cleaning Path	20"	28"	26", 30", 34"
Pad or Brush Size	20"	2 x 15"	3 x 12"
Solution/Recovery Tank	21 gal	21 gal	32 gal
Chemical Capacity	N/A	N/A	1 gal
Chemical Mixture Rates	N/A	N/A	32:1, 64:1, 96:1, 128:1
Water Flow Rate	.25/0.5/0.8/1.0 gpm	.25/0.5/0.8/1.0 gpm	1.0/0.8/0.5/0.25 gpm
Brush Pressure	52 lbs. max	70 lbs. max	160 lbs. max
Brush Speed	150 rpm	150 rpm	125-200 rpm
Brush Motor	1 x 24V, 600W	1 x 24V, 600W	3 x 24V, 400W
Traction Motor	400W	400W	600W
Working Speed	0.3 - 3.7 mph	0.3 - 3.7 mph	0.3 - 4.3 mph
Maximum Gradient	6°	6°	6°
Vacuum Motor Power	24V, 400W	24V, 400W	24V, 400W
Noise Level	65 dB(A)	65 dB(A)	69 dB(A)
Working Capacity (sq. ft./hr.)	30,000	43,300	26" – 40,200 30" – 46,000 34" – 52,500
Run Time	2.5 hrs	3.5 hrs	4 hrs
Batteries (gel)	2 x 12V, 100 Ah	2 x 12V, 140 Ah	6 x 12V, 100 Ah
Weight	441 lbs	484 lbs	1,100 lbs
Dimensions (LxWxH)	57" x 22" x 47"	57" x 30" x 47"	66" x 26" x 56"
Part No.	G00130	G00131	G00132

All models include pad drivers

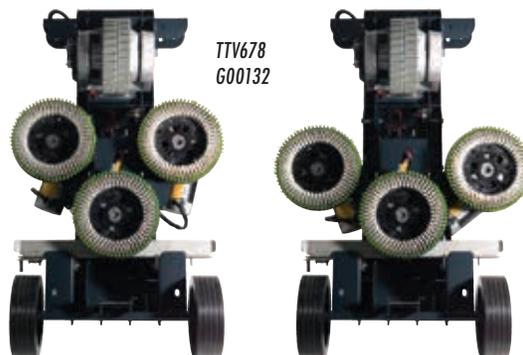

TTV678
G00132

Common Features and Benefits:

- Easy to identify RED operator parts
- Easy access gel batteries for longer run-times and longer battery life and safer than chemical batteries
- Easy to access wiring blocks for easier servicing and repairs
- Breakaway squeegee for safety
- Optional off-aisle wand kits available
- Improved long life green squeegee blades
- Easy on/off brush loading system
- Ergonomically optimized for maximum operator comfort and control
- Easy access in/out of driving position
- Upgraded plumbing connectors with increased flow
- Low noise – 69 dB(A) or under

Key Features of Gel Batteries

- Both economically and environmentally safer to use
- Completely spill proof with no emergency spill kit or safety goggles required.
- Acid will not leak if battery is damaged since the internal liquid is a thixotropic paste (solid gel) when charging
- Considered nonhazardous materials to transport and are completely explosion-proof
- Guaranteed longer life than wet batteries and easier to dispose of
- Maintenance-free with no terminal corrosion ever

Walk-Behind Scrubbers



TGB817
G00119



TGB1120
G00128



TGB1620T
G00125



TGB2228T
G00126

Walk-Behind Industrial Scrubbers

	TGB817	TGB1620	TGB1620T	TGB1120	TT1120	TGB2228T
Cleaning Path	17"	20"	20"	20"	20"	28"
Pad or Brush Size	17"	20"	20"	20"	20"	2 x 14"
Solution/Recovery Tank	8 gal	16 gal	16 gal	11 gal	11 gal	22.5 gal
Water Flow Rate	0-0.53 gpm	.25-1 gpm	.25-1 gpm	0-0.5 gpm	0-0.5 gpm	.3 to 1 gpm
Brush Pressure	64 lbs	90 lbs	90 lbs	75 lbs	105 lbs	110 lbs
Brush Speed (rpm)	150	150	150	150	180	150
Brush Motor	24V, 400W	24V, 400W	24V, 400W	24V, 400W	1000W	24V, 600W
Vacuum Motor Power	400W	24V, 400W	24V, 400W	24V, 400W	1200W	24V, 600W
Traction Motor			24V, 250W			600W
Noise Level	67 dB(A)	65 dB(A)	65 dB(A)	67 dB(A)	67 dB(A)	68 dB(A)
Working Capacity (sq. ft./hr.)	18,700	22,000	22,000	22,000	22,000	31,000
Working Speed						.3-4.3 mph
Climbing incline			11°			11°
Run Time (hours)	2-2.5 hr.	3-3.5	3-3.5	3-3.5		3.5
Batteries (gel)	2 x 12V 80Ah	2 x 100 Ah	2 x 100 Ah	2 x 100 Ah		4 x 100 Ah
Electric Cord					65 ft.	
Weight	277 lbs	393 lbs	424 lbs	277 lbs	150 lbs	580 lb
Dimensions (LxWxH)	44"x22"x43"	57"x22"x43"	57"x22"x43"	44"x22"x43"	44"x22"x43"	56"x24"x45"
Part No.	G00119	G00124	G00125	G00128	G00127	G00126

All models include pad driver

Common Features and Benefits:

- Easy to identify RED operator parts
- Easy access gel batteries for longer run times and longer battery life and safer than chemical batteries (except TT1120)
- Breakaway squeegee for safety
- Improved long life green squeegee blades
- Optional off-aisle wand kits available
- Easy on/off brush loading system
- Upgraded plumbing connectors with increased flow
- Easy to access wiring blocks for easier servicing and repairs
- Low noise – 68 dB(A) and under



INDUSTRIAL SCRUBBERS

Scrubber Accessories

Description	Fits Rider Model	Part No.	Fits Walk Behind Model	Part No.
Off aisle wand kit	All	161851	All	161851
Squeegee Blade Set, Small (650mm)	G00132	161849	G00119	161849
Squeegee Blade Set, Med (750mm)			G00124/125/127/128	163192
Squeegee Blade Set, Large (850mm)	G00132/G00131	161850	G00126	161850
Pad Driver – 12"	G00132	161845		
Pad Driver – 14"	G00131	162032	G00126	162032
Pad Driver – 15"			G00120/121/122/123/146/147	162032
Pad Driver – 17"			G00119	161436
Pad Driver – 20"	G00130	162037	G00124/125/127/128	162037
Brush, Poly Scrub – 12"	G00132	161846		
Brush, Soft Shampoo Brush – 12"	G00132	161847		
Brush, Poly Scrub – 14"	G00131	163264	G00126	163264
Brush, Soft Shampoo Brush – 14"	G00131	163451	G00126	163451
Brush, Poly Scrub – 16"			G00120/121/122/123/146/147	162033
Brush, Soft Shampoo Brush – 16"			G00120/121/122/123/146/147	162034
Brush, Poly Scrub – 17"			G00119	161437
Brush, Soft Shampoo Brush – 17"			G00119	161583
Brush, Poly Scrub – 20"	G00130	162042	G00124/125/127/128	162042
Brush, Soft Shampoo Brush – 20"	G00130	162902	G00124/125/127/128	162902

Compact Walk Behind Scrubbers

Compact Scrubbers

	TG516 Corded	TGB516NX Battery
Cleaning Path	15"	15"
Pad Size	15"	15"
Brush Size	16"	16"
Solution/Recovery Tank	5 gal	5 gal
Solution Flow Rate	0.9 gpm	0.9 gpm
Brush Pressure	55 lbs	55 lbs
Brush Speed (rpm)	150 rpm	200 rpm
Brush Motor	400W/.5 hp	400W/.5 hp
Vacuum Motor Power	400W/.5 hp	300W/.5 hp
Noise Level	67 dB(A)	65 dB(A)
Working Capacity	16,600 sf/hr	17,600 sf/hr
Cleaning Speed		
Power	115V electric	36V
Weight	85 lbs	75 lbs
Dimensions (LxWxH)	33"x18"x44"	33"x18"x44"
Part No. w/poly scrub brush	G00123	G00146
Part No. w/pad driver	G00122	G00147

*including battery

Compact Scrubber Optional Accessories

	Part No.
Extra Battery for TGB516NX / Charger-NX	163493 / 163494
Extra Battery for TGB516 / Charger (older model)	162035 / 162097
Squeegee Set	162330
Brush, Poly Scrub 16"	162033
Brush, Soft Shampoo Brush – 16"	162034
Pad Driver, 16"	162032



Floor Cleaners

The cleaners are a low foaming concentrate for use in autoscrubbers and mop & bucket. pH balanced for use on polished concrete floors. Dilute with water.



1 Gallon Concentrate Cleaner

Daily Cleaner	161233
Daily Cleaner with Lithium Densifier	163449
Heavy Duty Degreaser	161235

Packaged 4/case

Concrete Destroyer

Concrete Destroyer penetrates and attacks the portland cement causing a fizzing action to loosen bond to tools.

The standard destroyer can be diluted with water if used for soaking tools.

The foaming destroyer is a concentrate and needs to be diluted 50:50 with water and applied with a foaming sprayer to create the foam.



Concrete Destroyer – Standard Formula and Foaming

	Standard Formula	Foaming
32oz Premixed RTU with sprayer	100316	100335
1 Gallon	100317	100336
5 Gallon	100318	100337

32oz bottles are packaged 12/case

1 gallon bottles are package 4/case

55 Gallon Drum and 270 gallon totes also available.

Foamer Sprayer 1-1/2 Gallon is 100758

Diamond Hand Pads



Diamond Hand Pads

Grit	Part No.
60	130375
100	130376
200	130377
400	130378
800	130380
1500	130381
3000	130382

Steamer



Professional superheated steamer cleans at 338degF/115PSI. Superheated steam over 300degF is much drier (surfaces dry quickly for coatings). Unit is only 12Lbs.

Steamer

JS1600C	162216
---------	--------

Pressure Washer



Professional Grade Pressure washer with Ceramic seals and brass Triplex Pump.

Pressure Washer, 1400PSI

K1122TST	162257
----------	--------

SLURRY TREATMENT

SlurryDry Gel

The SlurryDry Gel products are super absorbent polymers to absorb the water out of the slurry. The QS is for quick solidification and the LS has slower reaction time but is more economical for Low Solids slurries that require more Gel to solidify. One 50 Lb Bag will treat approximately 600 Gallons of slurry.

SlurryDry Gel

	SlurryDry QS	SlurryDry LS
50 Lb Bag	100539	
40 Lb Bag		100767
4 Gallon Bucket	100542	100563
Sample Container	100623	100624



SlurrySep Flocculent

The SlurrySep Floc products are a Bentonite Clay mixture used to clarify the water by dropping out the suspended particles. About 10x more efficient than Gel, One 50 Lb Bag will treat approximately 6000 Gallons of slurry. Available with or without pH balancer (added acid crystals to reduce the pH levels).

SlurrySep Floc

	SlurrySep	SlurrySep-pH
50 Lb Bag	100540	100541
4 Gallon Bucket	100543	100544
Sample Container	100625	100626



Pump for Slurry Management

Hycon Hydraulic Trash Pumps with the vortex impeller and a lightweight air cooled powerpack are ideal for pumping slurry.



Hydraulic powerpack

	HPP14-Flex
Flow (GPM)	5 or 8GPM
PSI (Max/Nom)	2200/1750
Engine	Vanguard 14HP
Dim (LxWxH)	28 x 23-7/16 x 26-7/16
Weight	178 Lbs
Part No.	P00033



2" Hydraulic Trash Pump

	HWP2
Max Pumping Capacity	202 GPM
Max Lift	92 Ft
Max Solids Size	1-1/2"
Weight	10 Lbs
Part No.	110134



Hydraulic Hose

1/2 x 25FT Pair	151867
1/2 x 50FT Pair	151859



To place orders:

Call 866-688-1032 Or Fax: 877-220-4777

You will need the following items for Customer Service:

- Your purchase order number and/or name
- Company name and billing information
- Customer number
- Shipping address, if different from billing address
- Date needed
- Products desired and quantity

For detailed product information visit www.DITEQ.com.

Freight Policy

Equipment – Freight is paid (Ground Shipment) as one shipment to one location within the continental United States by the carrier of DITEQ’s choice for three (3) pieces of equipment shipped of equal value.

Diamond Tools – Freight is prepaid by the shipper and added to the invoice for orders less than \$500.00. Freight is paid (ground shipment) to one location within the continental United States by the carrier of DITEQ’s choice for orders of \$500.00 or greater.

Parts, Chemicals, and Abrasives – Freight is prepaid by the shipper and added to the invoice.

Orders of \$3,500 or greater in Diamond tools – Freight is paid (ground shipment) to one location within continental United States by carrier of DITEQ’s choice on the total order including all the additional items on the order.

Anything not meeting the exemptions above are Shipped FOB Factory.

We reserve the right to route all shipments via the carrier of DITEQ’s choice. Priority, Next Day or Two-day Service will be added to your invoice or billed collect. Shipments requiring special handling or to a residence may incur additional charges.

Terms and Conditions

Minimum order: For all finished product orders of less than \$50, a \$10 minimum order charge will be added. (shipping and tax excluded.)

Sales tax will be charged where applicable unless a tax exemption certificate is provided.

Repairs: Carefully package all returned items for repair and send with the following information on a packing slip:

- Your company name, address and phone number
- Original Invoice (warranty only)
- List of items for repair
- Returned Goods Authorization (RGA) number obtained from Customer Service
- Explanation of repair(s) needed.
- Replacement/Refund: All returned catalog items are subject to a 15% restocking fee. Returned for replacement or refund items should be in original cartons and accompanied by a packing slip with the following information:
- Contact customer service for a Returned Goods Authorization (RGA). (Merchandise cannot be accepted without this authorization.)
- List of items returned and reason(s) for return(s)
- Copy of original invoice(s). Merchandise receipt must be dated no longer than 12 months from date shipped.

Ship merchandise prepaid to:

DITEQ Corporation, 9876 Pflumm Road, Lenexa, KS 66215

We reserve the right to change and/or modify products and part numbers. Images within this catalog may not reflect the most current product line.

Prices are in U.S. dollars. Prices and specifications subject to change without notice.

© Copyright 2020 DITEQ Corporation. All rights reserved

Terms and Conditions / Warranty

LIMITED WARRANTY FOR NEW DITEQ EQUIPMENT

GENERAL PROVISIONS – The warranties described below are provided by DITEQ Corporation (“DITEQ”) to the original purchasers of new DITEQ Equipment from DITEQ or authorized DITEQ dealers. Under these warranties, DITEQ will repair or replace, at its option, any covered part which is found to be defective in material or workmanship during the applicable warranty term. Warranty service must be performed by DITEQ or a dealer or service center authorized by DITEQ to sell and/or service the type of product involved, which will use only new or re-manufactured parts or components furnished by DITEQ. Warranty service will be performed without charge to the purchaser for parts. The purchaser will be responsible, however for any service call and/or labor, transportation and/or freight of product to and from DITEQ, the dealer’s or service center’s place of business, for any premium charged for overtime labor requested by the purchaser, and for any service and/or maintenance not directly related to any defect covered under the warranties below.

WHAT IS WARRANTED – All parts of any new DITEQ Equipment are warranted for the number of months specified below. Component manufacturers offer separate warranties and warranty terms as stated below. Warranty statements required by law covering engine emission-related parts and components are found in the engine operating manual delivered with the machine. Each warranty term begins on the date of product delivery to the purchaser.

HYCON	12 Month
RGC	12 Month
NACECARE	12 Month
SHIBUYA	24 Month
MAXCUT	12 Month
DITEQ/MITO	12 Month

WHAT IS NOT WARRANTED – DITEQ IS NOT RESPONSIBLE FOR THE FOLLOWING:

- (1) Used products;
- (2) Any product that has been modified in ways not approved by DITEQ;
- (3) Depreciation or damage caused by normal wear, lack of reasonable and proper maintenance, failure to follow operating instructions, misuse, lack of proper protection during storage, transporting or accident;
- (4) Normal maintenance parts such as belts, bearings, filters, wheels, cutters, etc. and service.

SECURING WARRANTY SERVICE – To secure warranty service, the purchaser must (1) report the product defect to DITEQ, an authorized dealer or an authorized service center and request repair within the applicable warranty term, (2) present evidence of the warranty start date, and (3) make the product available to DITEQ, the dealer or service center within a reasonable period of time.

LIMITATIONS OF IMPLIED WARRANTIES AND OTHER REMEDIES – To the extent permitted by law, neither DITEQ nor any company affiliated with it makes any warranties, representations or promises as to the quality, performance or freedom from defect of the equipment covered by this warranty.

IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TO THE EXTENT APPLICABLE, SHALL BE LIMITED IN DURATION TO THE APPLICABLE PERIOD OF WARRANTY SET FORTH ON THIS PAGE. THE PURCHASER’S ONLY REMEDIES IN CONNECTION WITH THE BREACH OR PERFORMANCE OF ANY WARRANTY ON THE DITEQ EQUIPMENT ARE THOSE SET FORTH ON THIS PAGE. IN NO EVENT WILL THE DEALER, DITEQ OR ANY COMPANY AFFILIATED WITH DITEQ BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. (Note: Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages so the above limitations and exclusions may not apply to you.) This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

NO DEALER WARRANTY – THE SELLING DEALER MAKES NO WARRANTY OF ITS OWN AND THE DEALER HAS NO AUTHORITY TO MAKE ANY REPRESENTATION OR PROMISE ON BEHALF OF DITEQ, OR TO MODIFY THE TERMS OR LIMITATIONS OF THIS WARRANTY IN ANY WAY. If further information is desired, please contact DITEQ.



DITEQ Corporation
9876 Pflumm Road
Lenexa, KS 66215
Phone: 866-688-1032
Fax: 877-220-4777
www.diteq.com

DITEQ Georgia
6450 Joe Frank Harris Pkwy
Adairsville, GA 30103
Toll Free: 800-633-0519